


出厂内机密请勿携出

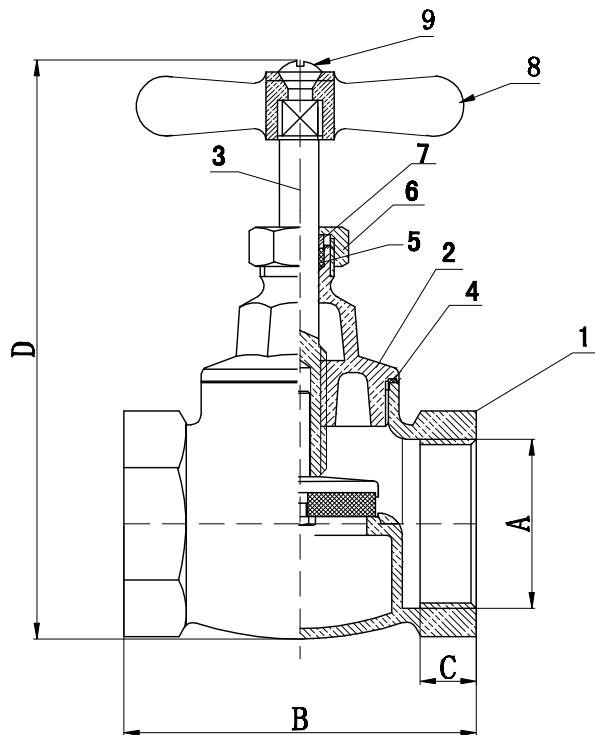

CODE	A	B	C	D
M34100000	1 1/4"	88	14	138
M34120000	1 1/2"	100	16	156
M34160000	2"	116	17	180

Specification

Fields of applications: water

Maximum working pressure: 16bar (0-30℃); 10bar(30-85℃)

Maximum working temperature: 85℃

M34100000	STOPCOCK Fx F 1 1/4"
M34120000	STOPCOCK Fx F 1 1/2"
M34160000	STOPCOCK Fx F 2"

版本号

生产

打样

试制

修改

版次

A 0

11					
10					
9		Screw	HPb59-T	1	
8		Handle	HPb59-T	1	
7		Lock ring	HPb59-T	1	
6		Lock nut	HPb59-T	1	
5		Packing	PTFE	1	
4		Sealing gasket	PTFE	1	
3		Stem	HPb59-T+EPDM	1	
2		Bonnet	HPb59-T	1	
1		Body	Bronze	1	
ITEM	NO.	parts name	material	QTY.	

未注尺寸公差

基本尺寸

公差

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

标注

品名:

STOPCOCK Fx F 1 1/4---2"

艾迪西流体控制股份有限公司
IDC Fluid Control Co L TD

材料:	重要尺寸
重量:	关键尺寸
编号:	
客户编号:	