


出厂前请密封勿携出

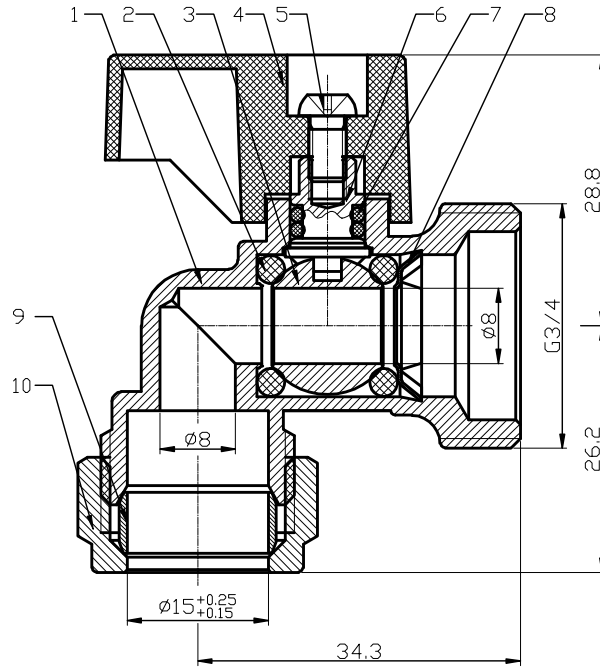

Specification

Fields of applications: water;

Maximum working pressure: PN10;

Operating temperature range: $-10 \sim +85^{\circ}\text{C}$;

Valves are manufactured to BS6675;

Compression connections comply with EN1254-2;

Male thread connections are to ISO228;

WRAS approved

版次		A		0		打样		生产		✓		发放号	
Male thread connections are to ISO228; WRAS approved													
未注尺寸公差		基本尺寸		公差		10		Comperssion nut	HPb59-T	1	NP		
						9		Olive	T2 Copper	1			
						8		Catch spring	SS302	1			
						7		O-ring	EPDM	2			
						6		Stem	HPb59-T	1			
						5		Screw	Q235	1			
						4		Handle	Plastic	1	Red and blue		
						3		Ball	HPb59-T	1	CP		
						2		O-ring	NBR	2			
未注尺寸公差		基本尺寸		公差		1		Body	HPb59-T	1	NP		
						ITEM	NO.	parts name	material	QTY.			
						品名:						 重要尺寸	
						15mm x 3/4in W/M Valve Angle NP						 关键尺寸	
						材料: HPb59-T						重量:	
						艾迪西流体控制股份有限公司						编号:	
						IDC Fluid Control Co LTD						客户编号: MWMA 1506	
						更改内容							
						设计 Alger						比例 1:1	
审核						公差等级 IT14							
批准						幅面 A4							
归档						总1页 第1页							