


五、携勿请密机内厂

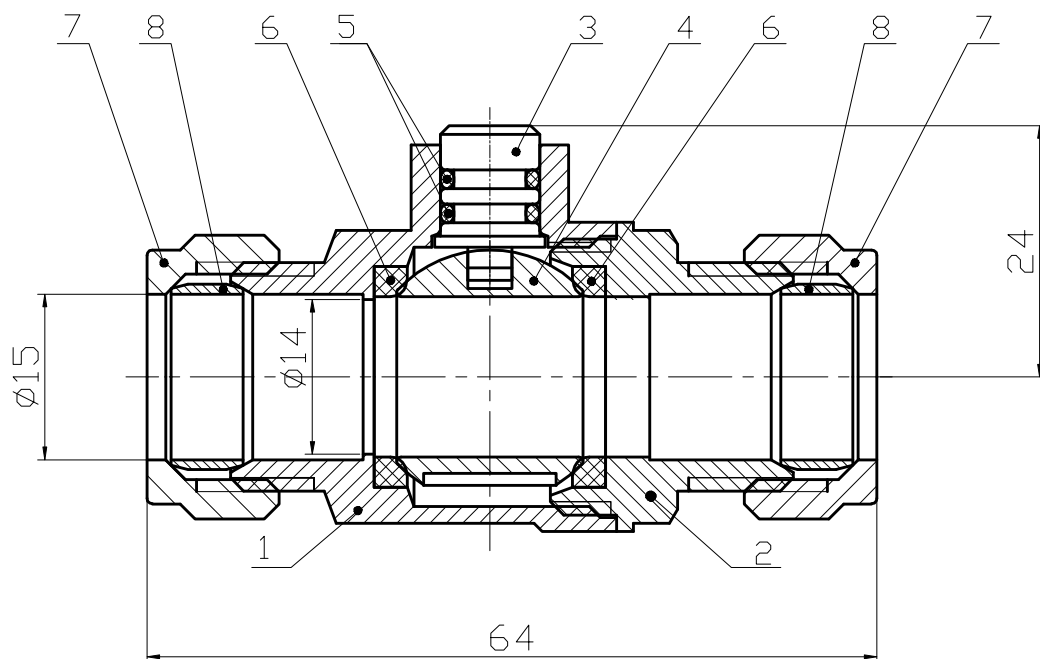

Specification

Fields of applications: water;

Maximum working pressure: PN16;

Operating temperature range: $-10 \sim +85^{\circ}\text{C}$;

Valves are manufactured to BS6675;

Compression connections comply with EN1254-2;

WRAS approved, heavy patten.

8		Olive	T2 Copper	2	
7		Comperssion nut	HPb59-T	2	NP
6		Seat	PTFE	2	
5		O-ring	EPDM	2	
4		Ball	HPb59-T	1	
3		Stem	HPb59-T	1	NP
2		Bonnet	HPb59-T	1	NP
1		Body	HPb59-T	1	NP
ITEM	NO.	parts name	material	QTY.	

				品名:		 重要尺寸  关键尺寸	
				FULL BORE ISOLATING VALVE 15MM		材料: HPb59-T	
标记/处数		更改内容		签名/日期		重量:	
设计				比例 1:1		编号:	
审核				公差等级 IT14		艾迪西流体控制股份有限公司 IDC Fluid Control Co L TD 客户编号: M30150000P	
批准				幅面 A4			
归档				总1页 第1页			